



General Arrangement Plan

Linked Infill Installation
 With the umbrellas installed and opened:
 1. Remove 2nd nuts and washers from the underside of the appropriate arms that have extended bolts.
 2. Fit the link plates to the bolts on the underside of the arms and tighten the nuts. Use the slotted holes for adjustment.
 3. On one side, tie off the shock cord to the arm near the first eyelet and thread the shock cord from eyelet to eyelet between the 'frog' and the infill panel. Do not pull the lacing tight. *(Thread the cord into the front side of the eyelet. i.e. from the bottom, up and out the top then over to the bottom and up, and so on.)*
 4. Repeat step 3 for the other side.
 5. Tighten the lacing ensuring that the arch bar stays central between the membrane edges (Refer Section B-B). Tie off the cords to the arms.
 6. Check that the nuts are secure and tight, and that the tension on the infill panel from the shock cord is even both across and along the panel.

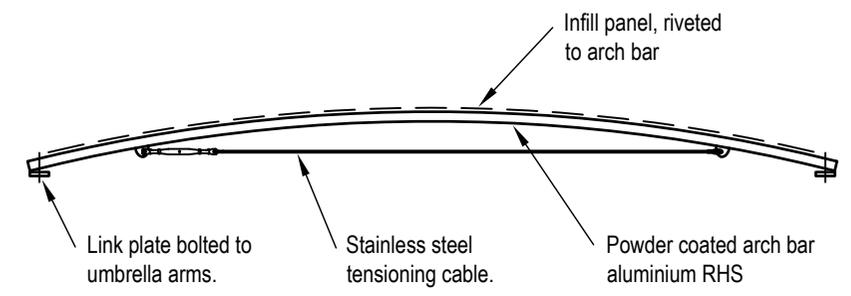


Section A-A

The infill is supplied as a unit. Consisting of:
 - Infill panel, riveted to the arch bar, with shock cord attached.
 - Aluminium arch bar with tensioning cable and bolted on link plates.

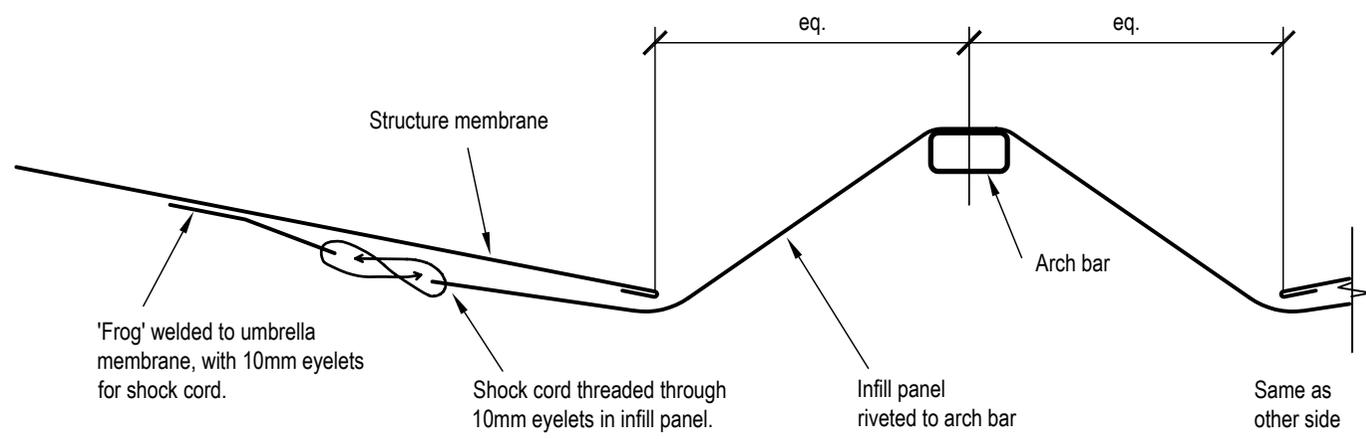

Section B-B

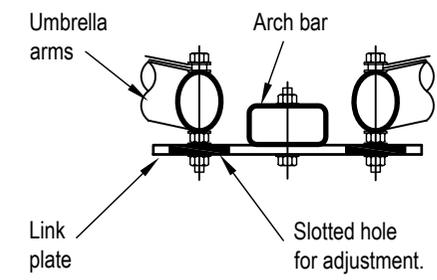

View C-C